


# MAIN BOOM GOOSENECK

PNMYC Pearls, Philip H.

## T/37 ALTERNATE ATTACHMENT OF VANG AND GOOSENECK RINGS

I chose to avoid drilling through the mast at its area of highest stress.

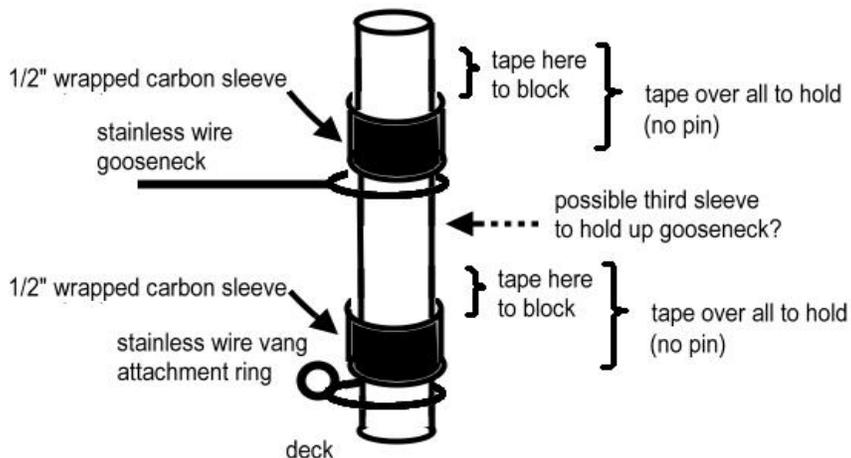

Note: 1/4" of the barrel of a BIC pen does just as well as a carbon sleeve here.  
AND it can be split and snapped onto the spar without removal from the boat.

